


# Distributor Post

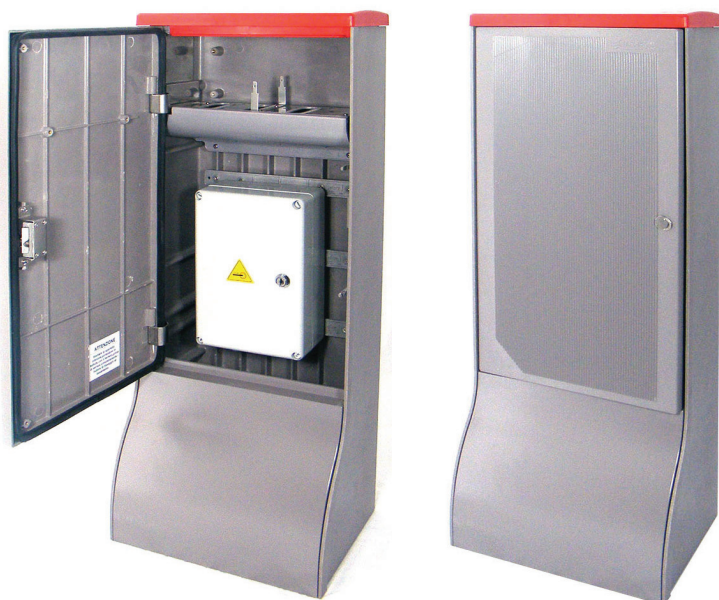

Optotec's Distributor Post is the termination point or sectioning point of the telephone networks (either copper or fibre) where start connection to the customers. Generally it is installed in the proximity of the end user. The Distributor Post is designed to be installed for copper and fibre network or in an hybrid combination; internally you can accomodate modules for IDC copper cable termination and boxes for splice and termination of fiber optic cables.

Optical cables (access network or end user) are terminated through the splicing of connectorized patch-cords within appropriate cassettes with a maximum potential up to 24 fibres.


The Distributor Post is fixed to the ground using a galvanized iron frame or with a basement of composite material (VTR/SMC).

## KEY FEATURES AND BENEFITS

The installation of the IDC module is positioned at the top to facilitate the installer/operator

DESCRIPTION		
PARAMETERS	UNIT	PERFORMANCE
Height	mm	900
Width	mm	350
Depth	mm	260

- ❶ Stainless steel hinges
- ❷ Plate to install IDC modules
- ❸ Mini Lock type
- ❹ Supports cable lock (3)
- ❺ Guides for cables entry
- ❻ Cables entry
- ❼ Pedestal Body
- ❽ Safety blocked door
- ❾ Cover

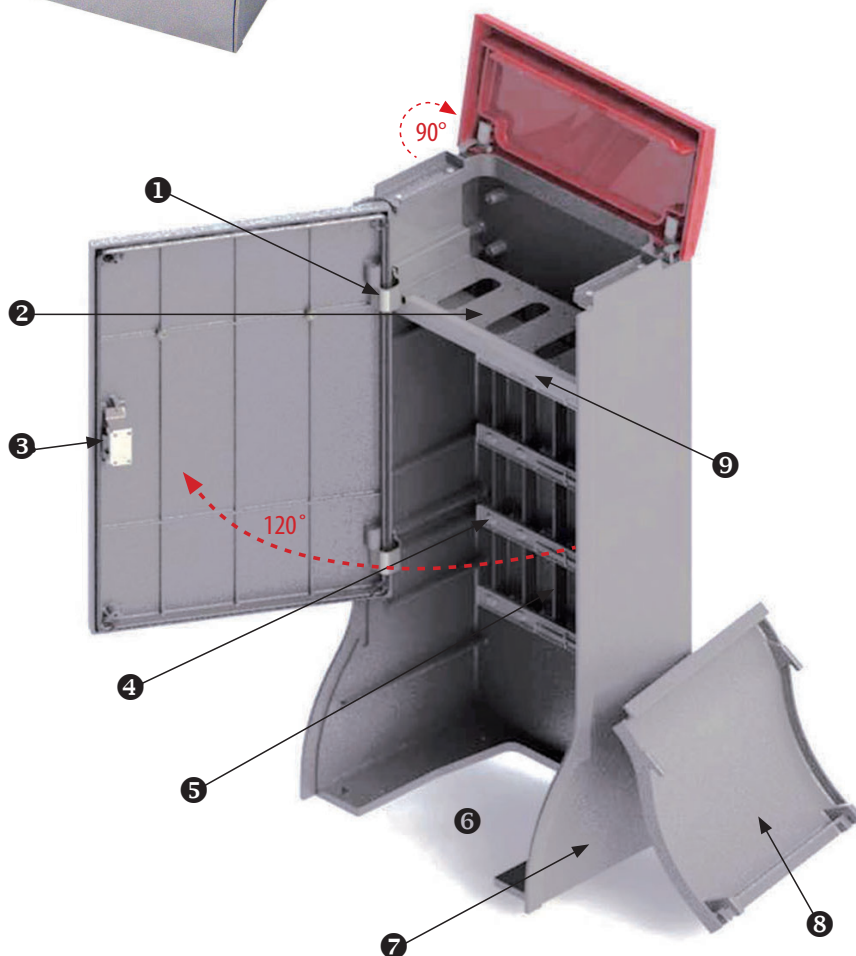

OPTOTEC PN	DESCRIPTION
NOST0405	Outdoor Hybrid Termination Post





35

31