

# BOX STANDARD

Optical wall-mounting Boxes are typically used inside customer premises as demarcation point between OSP and Building access networks. They can also be used outdoor above ground level applications or into street cabinets.

All Optotec Standard boxes are environmentally sealed for the fibre management system provide and splicing 'n' patching as well as components integration. The products are designed to allow the routing of the fibres with a minimum bend radius of 30mm throughout the whole system.


The FOCUS splicing modules offer access to selective fibres for maintenance and upgrades without affecting active.



BOX 1S



BOX 1M



BOX 2S



BOX 2M



BOX 3S



BOX 3M

BOX TYPE	PARAMETERS						
	SPLICE CAPACITY					MAX PORT ENTRIES (IN+OUT)	DIMENSIONS IN MM W x H x D
	SC6	SE3	HD4	HD6	HD3- HD24		
1S	24	36	48	48	72	3	140x190x80
2S	48	72	96	96	144	4	185x275x88
3S	96	144	192	192	288	10	300x380x120



BOX WBO



BOX IP67


BOX TYPE	PARAMETERS			
	MAX FIBRES TERMINATIONS		MAX PORT ENTRIES (IN+OUT)	DIMENSIONS IN MM W x H x D
	STD	SFF		
1M	8	12	1+2	140x190x80
2M	12	24	1+3	185x275x88
3M	24	48	2+8	300x380x120
WBO	48	96	3+ 6/8	300x380x210
IP67	8	16	1+1	180x278x130

[www.optotec.com](http://www.optotec.com)

CON CX CP OSP CO FOCUS

The information given herein, including drawings illustration and schematics which are intended for illustration purposes only, is believed to be reliable. However, Optotec makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Optotec' obligations shall only be as set forth in Optotec' Standard Terms and Conditions of Sale for this product and in no case will Optotec be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of Optotec products should make their own evaluation to determine the suitability of each such product for the specific application.

# BOXES 3S - 3M Optical Wall-Mounting Boxes

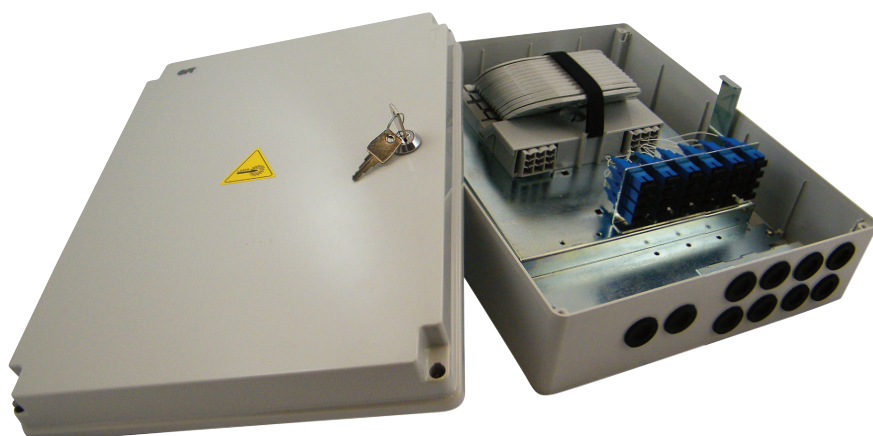

## KEY FEATURES AND BENEFITS

Essential and refined design minimize cables routings

Locked, pivoting and removable door for easy and protected access

Cable seal kits and accessories for easier installation

## APPLICATIONS

Storage of splices from outdoor to indoor cables

Storage of splices from outdoor to pigtails cables

Telecommunication enclosure for floor optical distribution

OSP Drop cable terminations for access networks


Customized compact environmental protection

 [LOOK BOXES CABLE ENTRIES DATASHEET](#)


## BOX 3S - 3M PERFORMANCE

DIMENSIONS IN MM	PROTECTION LEVEL	MATERIAL	WEIGHT	MAX PORT ENTRIES:	MAX PORT EXIT:	DOOR OPENING:
316x396x128	IEC 60529 IP55	PVC RAL 7035	4.5 kg	2	8	fully removable

BOX 3 S		
SPICE CAPACITY	SC6	96
	SE3	144
	HD4	192
	HD6	192
	HD3- HD24	288
MAX PORT ENTRIES (IN+OUT)		10

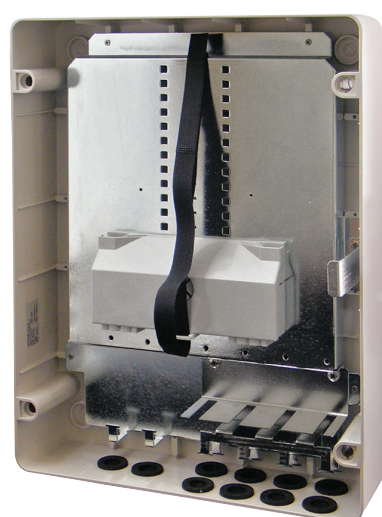

BOX 3M		
MAX FIBRES TERMINATIONS	STANDARD	24
	SFF	48
MAX PORT ENTRIES (IN+OUT)		2+8

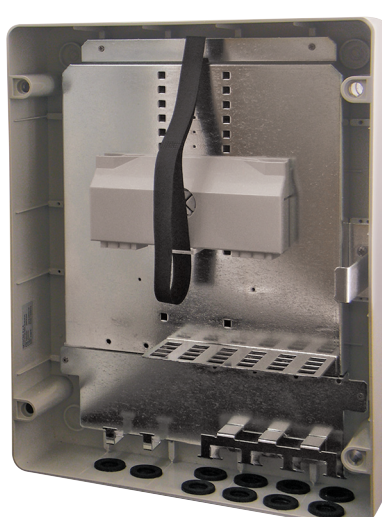

OPTOTEC PN	REFERENCE PN	DESCRIPTION
2502400	FOCUS-BOX3S-NN00-0X-0X	Large Splice Box - no tray
2502300	FOCUS-BOX3M-NN00-50-00-00-XX	Large Patch/Splice Box for 12 (24 SFF) SC connectors no tray
2502302	FOCUS-BOX3M-NN00-T0-00-00-XX	Large Patch/Splice Box for 8 (12 SFF) FCD/ST connectors no tray

FOCUS     

[www.optotec.com](http://www.optotec.com)

The information given herein, including drawings illustration and schematics which are intended for illustration purposes only, is believed to be reliable. However, Optotec makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Optotec' obligations shall only be as set forth in Optotec' Standard Terms and Conditions of Sale for this product and in no case will Optotec be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of Optotec products should make their own evaluation to determine the suitability of each such product for the specific application.